




LEOPARD IMAGING INC

LI-XAVIER-KIT-IMX274CS-X

Data Sheet


Key Features

- Compatible with Nvidia® Jetson AGX Xavier™ Developer Kit
- MIPI CSI-2 interface
- Support up to four 4-lane cameras
- Sony Diagonal 7.20 mm (Type 1/2.5) CMOS Image Sensor IMX274
- Active pixels: 3864H x 2196V
- Pixel size: 1.62 μm x 1.62 μm
- Color camera
- Length of the I-PEX cable: 300mm
- Support multiple length cables
- Support IR cut switch
- Support CS lens
- Provide customization services
- Part#:
(1 cam) **LI-XAVIER-KIT-IMX274CS**
(2 cam) **LI-XAVIER-KIT-IMX274CS-D**
(3 cam) **LI-XAVIER-KIT-IMX274CS-T**
(4 cam) **LI-XAVIER-KIT-IMX274CS-Q**

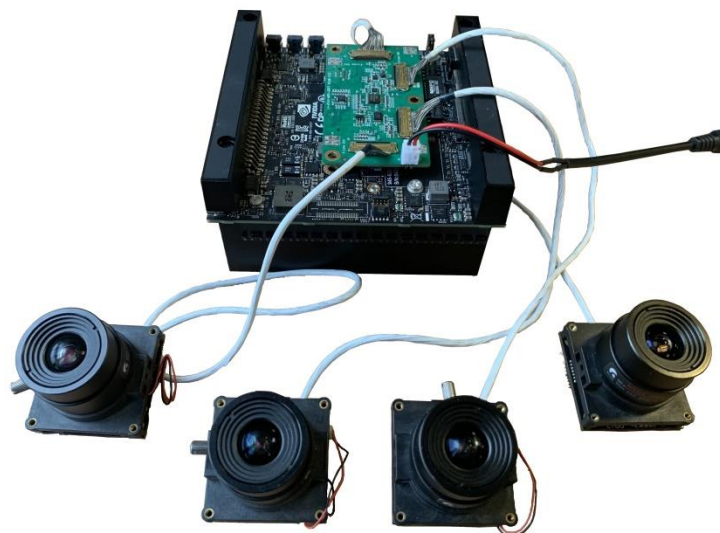

Lens Spec

- Model: ES0522F.IR
- Focal length: 5.0 mm
- Aperture, F/#: 2.2
- FOV (D/H/V): 87 °/ 76 °/43 °
- TV Distortion: < -8%
- Mount Type: CS

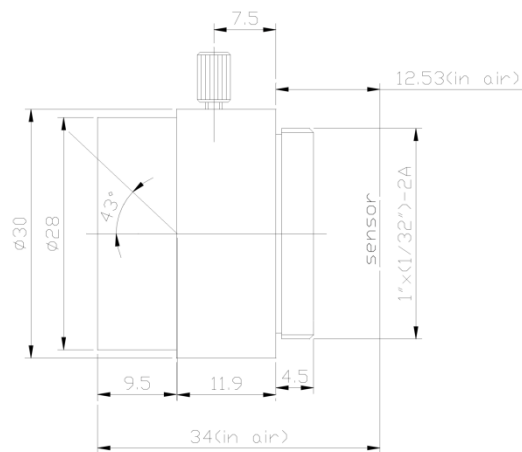

BOM

Nvidia AGX Xavier Developer Kit not included

#	Items	QTY
1	LI-JXAV-MIPI-ADPT-4CAM	1
2	LI-IMX274-MIPI-CS	1,2,3 or 4
3	FAW-1233-03 cable	1,2,3 or 4



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

LI-XAVIER-KIT-IMX274CS

BOM

#	Items	QTY
1	LI-JXAV-MIPI-ADPT-4CAM	1
2	LI-IMX274-MIPI-CS	1
3	FAW-1233-03 cable	1



LI-XAVIER-KIT-IMX274CS-D

BOM


#	Items	QTY
1	LI-JXAV-MIPI-ADPT-4CAM	1
2	LI-IMX274-MIPI-CS	2
3	FAW-1233-03 cable	2



LI-XAVIER-KIT-IMX274CS-T

BOM


#	Items	QTY
1	LI-JXAV-MIPI-ADPT-4CAM	1
2	LI-IMX274-MIPI-CS	3
3	FAW-1233-03 cable	3

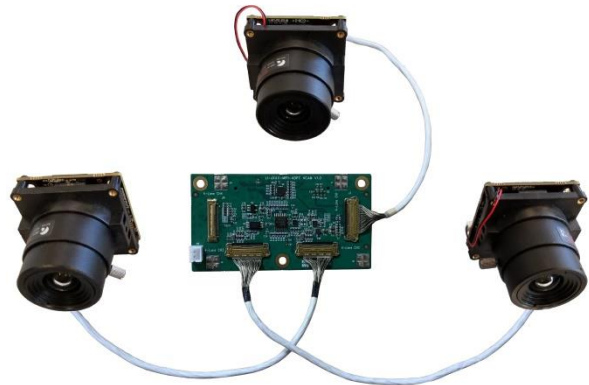

LI-XAVIER-KIT-IMX274CS-Q

BOM

#	Items	QTY
1	LI-JXAV-MIPI-ADPT-4CAM	1
2	LI-IMX274-MIPI-CS	4
3	FAW-1233-03 cable	4

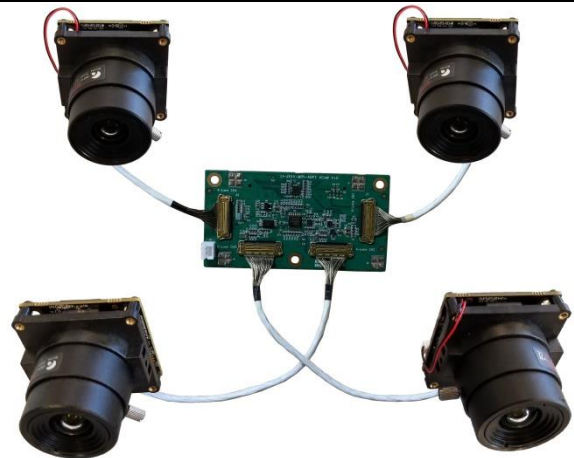


Leopard Imaging Inc.


48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Dimensions


LI-IMX274-MIPI-CS

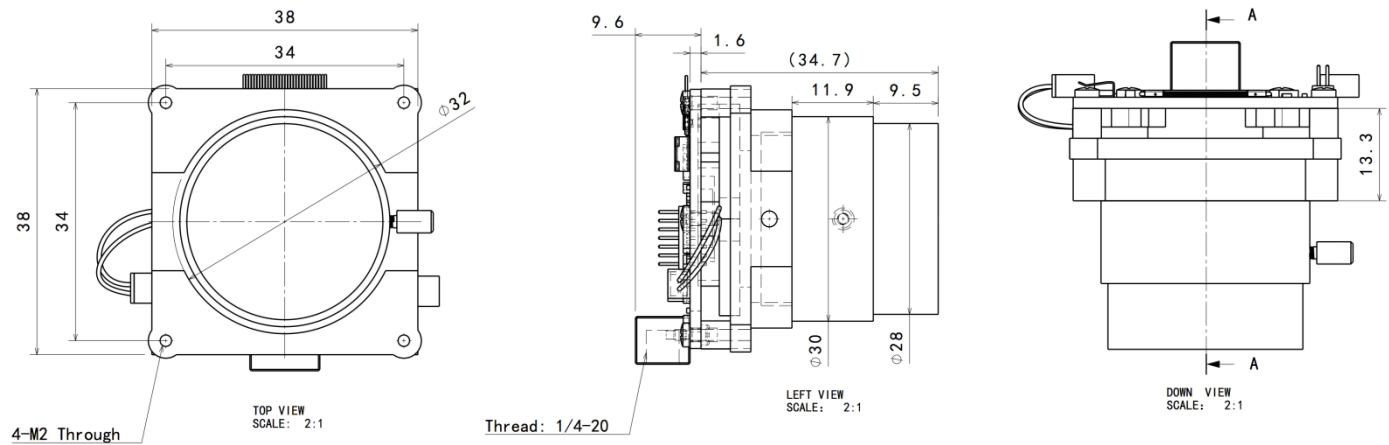

LI-JXAV-MIPI-ADPT-4CAM

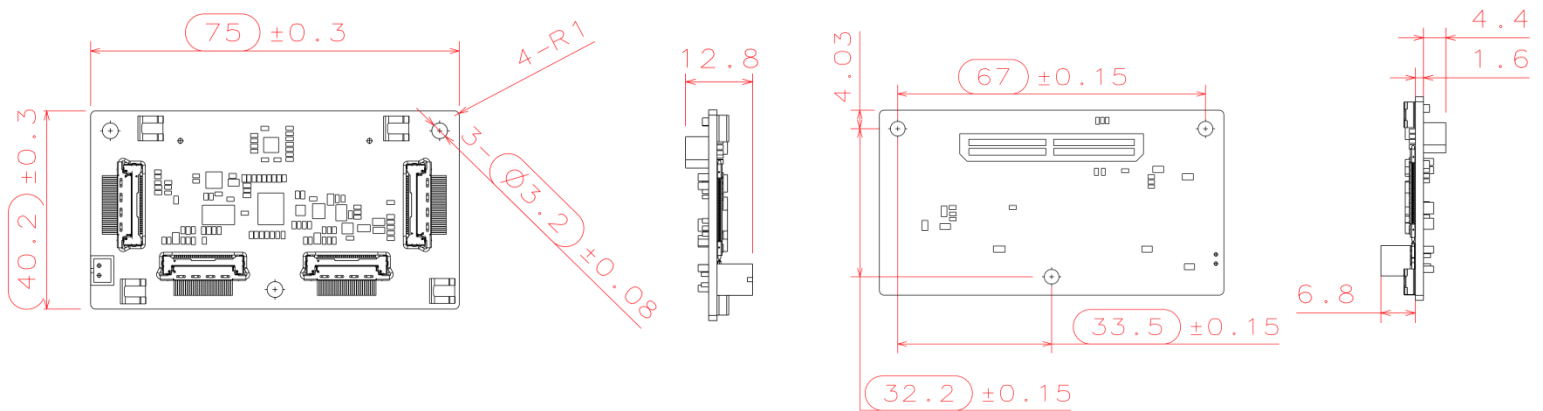


FAW-1233-03

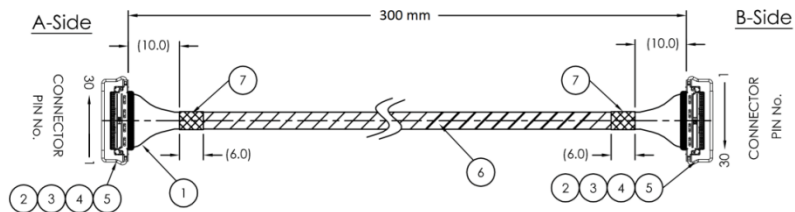

Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com


LI-JXAV-MIPI-ADPT-4CAM

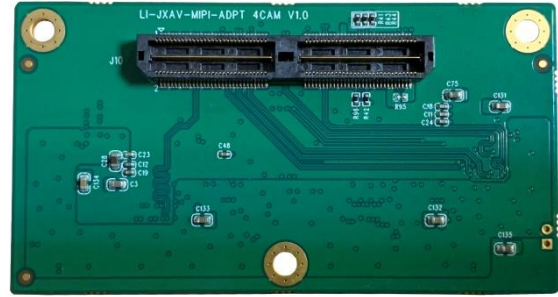

Interfaces


Interface J1

- Part#: 20525-030E-02C
- Number of Positions: 30
- Pitch: 0.4mm
- Mating I-PEX cable: FAW-1233-03 (300mm)

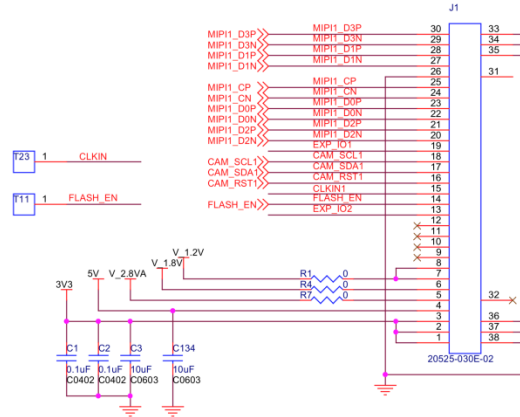


Interface J2

- Part#: 20525-030E-02C
- Number of Positions: 30
- Pitch: 0.4mm
- Mating I-PEX cable: FAW-1233-03 (300mm)

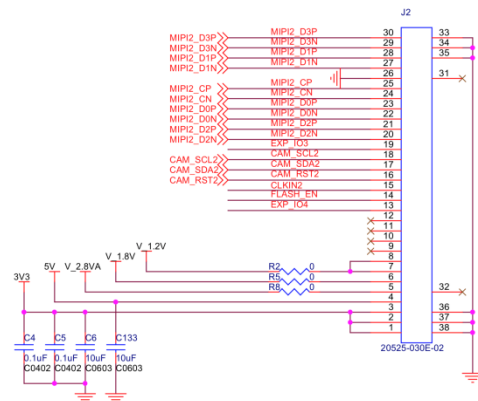

Interface J3

- Part#: 20525-030E-02C
- Number of Positions: 30
- Pitch: 0.4mm
- Mating I-PEX cable: FAW-1233-03 (300mm)

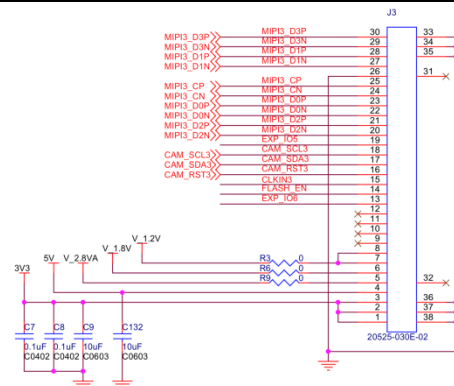


Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com


Interface J4

- Part#: 20525-030E-02C
- Number of Positions: 30
- Pitch: 0.4mm
- Mating I-PEX cable: FAW-1233-03 (300mm)

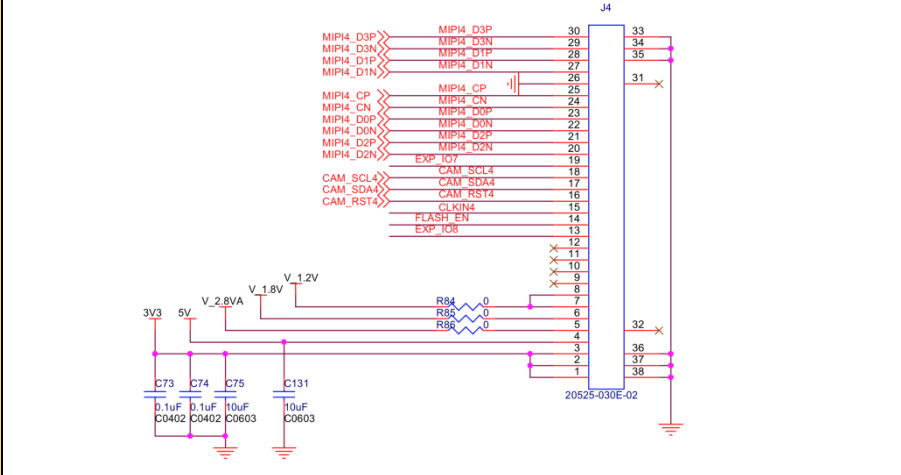



Interface J5	
--------------	--

- Part#: 0894000220
- Number of Positions: 2
- Pitch: 2mm

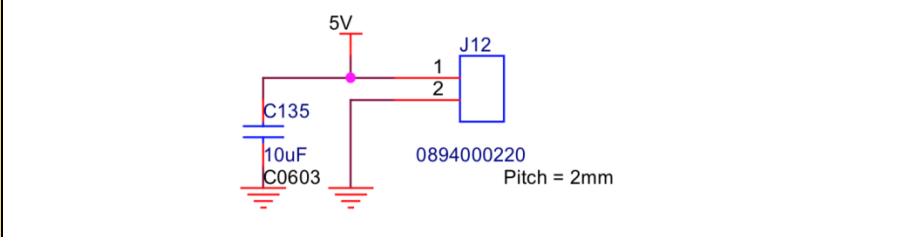


Interface J10

- Part#: QTH-060-01-L-D-A
- Number of Positions: 120
- Number of Rows: 2
- Pitch: 0.5 mm

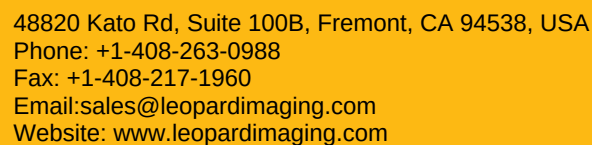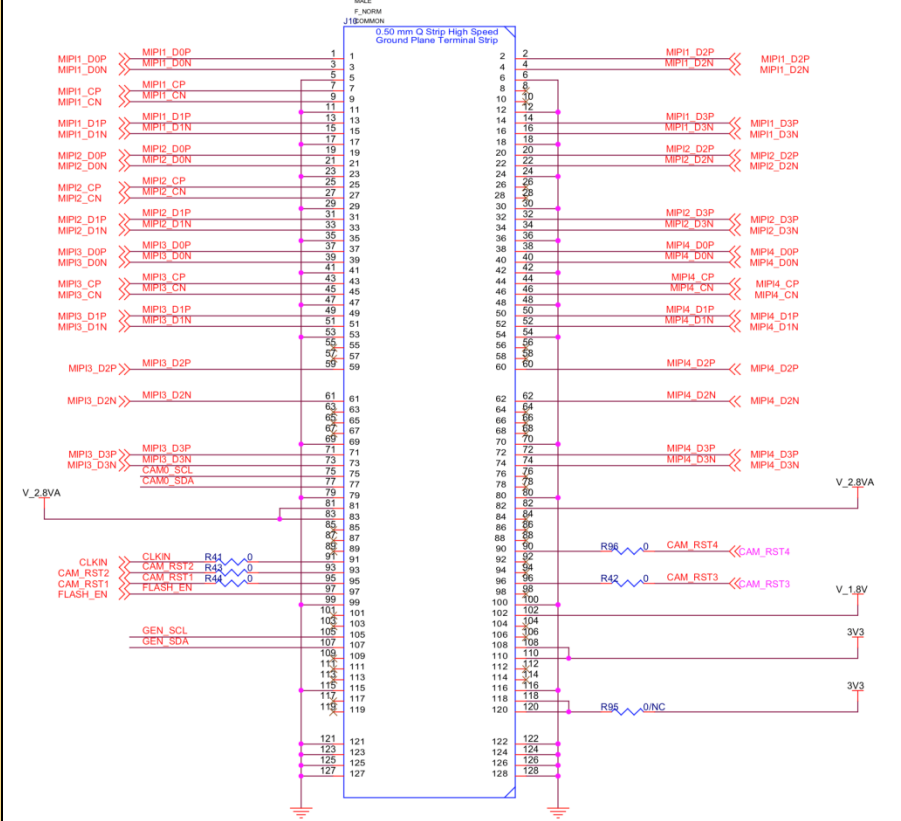

LI-IMX274-MIPI-CS

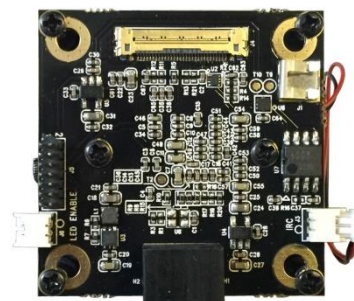

Camera Spec	
Image Sensor	Sony Diagonal 7.20 mm (Type 1/2.5) CMOS Image Sensor IMX274
Optical format	1/2.5"
Number of active pixels	3864 (H) x 2196 (V)
Pixel size	1.62um (H) x 1.62um (V)
Color or Mono	Color
Interface	MIPI interface
Lens mount	CS
IR switcher	Support
Weight	58 g
Interfaces	
Interface J2: - Part#: 20525-030E-02C - Number of Positions: 30 - Pitch: 0.4mm - Mating I-PEX cable: FAW-1233-03 (300mm)	
Interface J3: - Part#: 1734829-2 - Number of Positions: 2 - Pitch: 1.25mm	
Interface J5: - Part#: 1734829-2 - Number of Positions: 2 - Pitch: 1.25mm	



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit
Supply voltage (Analog)	V_{ADD}^{*1}	-0.3 to +3.3	V
Supply voltage (Digital 1)	V_{DDD1}^{*2}	-0.5 to +2.0	V
Supply voltage (Digital 2)	V_{DDD2}^{*3}	-0.5 to +3.3	V
Input voltage (Digital)	V_I	-0.3 to $V_{DDD2} + 0.3$	V
Output voltage (Digital)	V_O	-0.3 to $V_{DDD2} + 0.3$	V
Guaranteed operating temperature	T_{OPR}	-30 to +75	°C
Storage guarantee temperature	T_{STG}	-30 to +80	°C
Performance guarantee temperature	T_{SPEC}	-10 to +60	°C

Recommended Operating Conditions


Item	Symbol	Rating	Unit
Supply voltage (Analog)	V_{ADD}^{*1}	2.8 ± 0.1	V
Supply voltage (Digital 1)	V_{DDD1}^{*2}	1.2 ± 0.1	V
Supply voltage (Digital 2)	V_{DDD2}^{*3}	1.8 ± 0.1	V
Input voltage (Digital)	V_I	-0.1 to $V_{DDD2} + 0.1$	V

*1 V_{ADD} : V_{DDSUB} , V_{DDHCM} , V_{DDHPX} , V_{DDHDA} , V_{DDHCP} (2.8 V power supply)

*2 V_{DDD1} : $V_{DDL CN}$, $V_{DDL SC1}$ to 2, $V_{DDL PA}$, $V_{DDL PL1}$, $V_{DDL PL2}$ to 3, $V_{DDL IF}$ (1.2 V power supply)

*3 V_{DDD2} : V_{DDMIO} , V_{DDMIF} (1.8 V power supply)

Spectral Sensitivity Characteristics

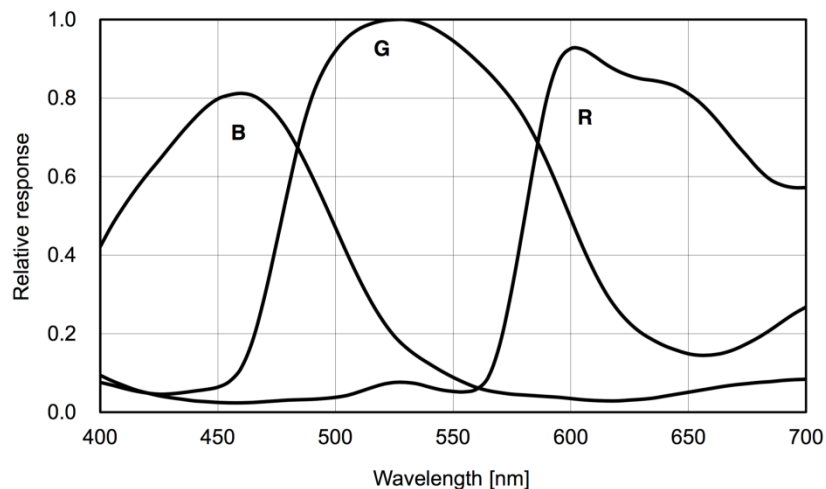

DC Characteristics

Current Consumption and Gain Vatriable Range

($V_{ADD} = 2.9\text{ V}$, $V_{DDD1} = 1.3\text{ V}$, $V_{DDD2} = 1.9\text{ V}$, $T_j = 60\text{ }^{\circ}\text{C}$, Reference Gain (0 dB)

All pixel scan mode (MODE0), 29.97 frame/s)

Item	Symbol	Min.	Typ.	Max	Unit	Remarks
Current consumption (Analog)	I_{ADD}	—	—	62	mA	
Current consumption (Digital 1)	I_{DDD1}	—	—	190	mA	
Current consumption (Digital 2)	I_{DDD2}	—	—	1	mA	
Standby current (Analog)	I_{ADDSTB}	—	—	35	μA	In the dark
Standby current (Digital 1)	$I_{DDD1STB}$	—	—	13	mA	In the dark
Standby current (Digital 2)	$I_{DDD2STB}$	—	—	20	μA	In the dark
PGA gain variable range	PGAG	0	—	27	dB	

Supply Voltage and I/O Voltage

Item		Pins	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	Analog	V _{DDSUB} , V _{DDHCM} , V _{DDHPX} , V _{DDHDA} , V _{DDHCP}	V _{ADD}	2.70	2.80	2.90	V
	Digital 1	V _{DDL} CN, V _{DDL} LSC1 to 2, V _{DDL} LPL1, V _{DDL} LPA, V _{DDL} LPL2 to 3, V _{DDL} LIF	V _{DDD1}	1.10	1.20	1.30	V
	Digital 2	V _{DD} MIO, V _{DD} MIF	V _{DDD2}	1.70	1.80	1.90	V
Digital input voltage		SDA, SCL	V _I H1	0.7 × V _{DDD2}	—	1.9	V
			V _I L1	−0.3	—	0.3 × V _{DDD2}	V
		XCLR, INCK	V _I H2	0.65 × V _{DDD2}	—	V _{DDD2} + 0.3	V
			V _I L2	−0.3	—	0.35 × V _{DDD2}	V
Digital output voltage		XHS, XVS	V _{HV} OUT	—	V _{DDD2}	—	V




Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com


AC Characteristics

INCK, XCLR

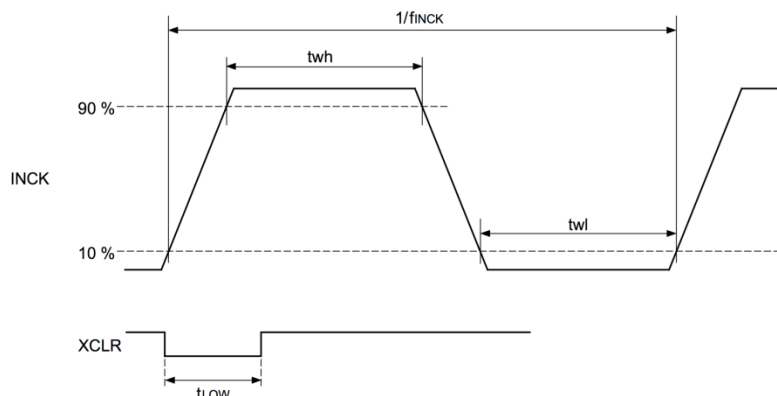

Item	Symbol	Min.	Typ.	Max.	Unit
INCK clock frequency	f_{INCK}	6	—	27	MHz
INCK Low level pulse width	twl	5	—	—	ns
INCK High level pulse width	twh	5	—	—	ns
Clock duty	—	40	50	60	%
XCLR Low level pulse width	t_{LOW}	100	—	—	ns

XHS, XVS (Output)

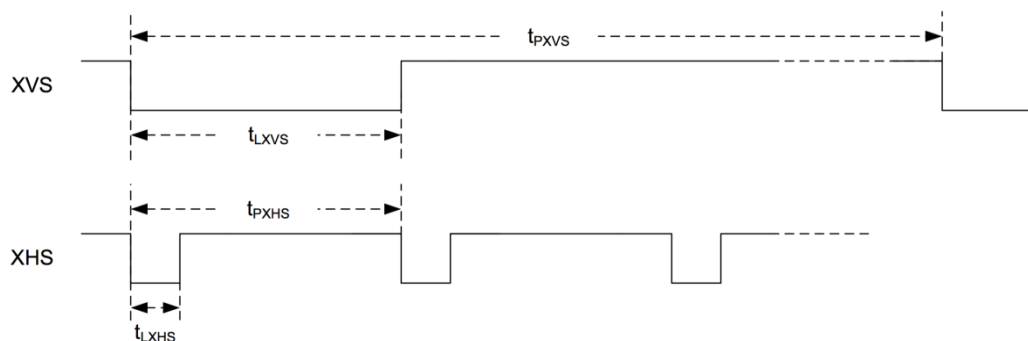

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
XHS Low level pulse width	t_{LXHS}		222		ns	16 clk@72MHz
XHS pulse period	t_{PXHS}		$HMAX^{*1}$		clk@72MHz	
XVS Low level pulse width	t_{LXVS}		t_{PXHS}		clk@72MHz	
XVS pulse period	t_{PXVS}		$HMAX^{*1} \times VMAX^{*2}$		clk@72MHz	

^{*1} The value set as HMAX (address 30F6h, bit [7:0] and address 30F7h, bit [7:0])


^{*2} The value set as VMAX (address 30F8h, bit [7:0], address 30F9h, bit [7:0] and address 30FAh, bit [3:0]).



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

I²C Communication

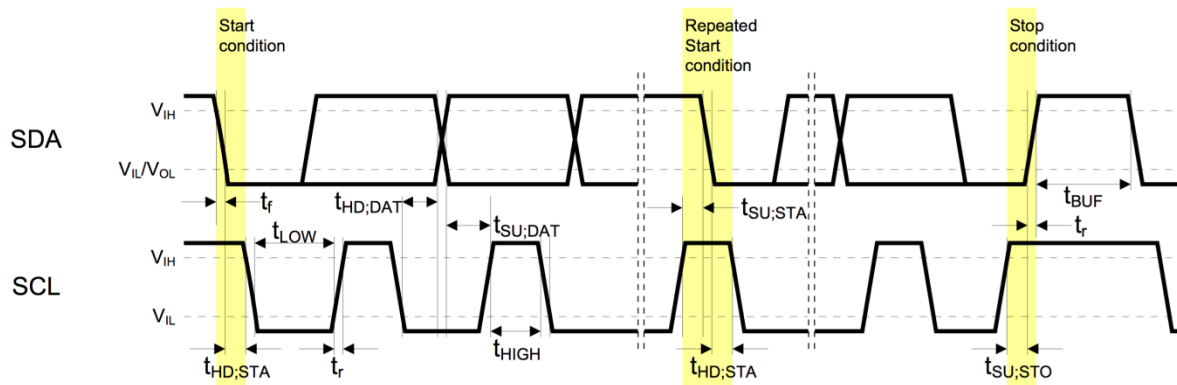

I²C Specification

Item	Symbol	Min.	Typ.	Max.	Unit	Remarks
Low level input voltage	V_{IL}	-0.3	—	$0.3 \times V_{DD2}$	V	
High level input voltage	V_{IH}	$0.7 \times V_{DD2}$	—	1.9	V	
Low level output voltage	V_{OL}	0	—	$0.2 \times V_{DD2}$	V	$V_{DD2} < 2\text{ V}$, Sink 3 mA
Output fall time	t_{of}	—	—	250	ns	Load 10 pF to 400 pF, $0.7 \times V_{DD2}$ to $0.3 \times V_{DD2}$
Input current (SCL, SDA, XCLR, INCK)	I_i	-10	—	10	μA	$0.1 \times V_{DD2}$ to $0.9 \times V_{DD2}$
Input capacitance of SCL / SDA	C_i	—	—	10	pF	

I²C AC Characteristics


Item	Symbol	Min.	Typ.	Max.	Unit
SCL clock frequency	f_{SCL}	0	—	400	kHz
Hold time (Start Condition)	$t_{HD;STA}$	0.6	—	—	μs
Low period of the SCL clock	t_{LOW}	1.3	—	—	μs
High period of the SCL clock	t_{HIGH}	0.6	—	—	μs
Set-up time (Repeated Start Condition)	$t_{SU;STA}$	0.6	—	—	μs
Data hold time	$t_{HD;DAT}$	0	—	0.9	μs
Data set-up time	$t_{SU;DAT}$	100	—	—	ns
Rise time of both SDA and SCL signals	t_r	—	—	300	ns
Fall time of both SDA and SCL signals	t_f	—	—	300	ns
Set-up time (Stop Condition)	$t_{SU;STO}$	0.6	—	—	μs
Bus free time between a STOP and START Condition	t_{BUF}	1.3	—	—	μs



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com


Power-on Sequence

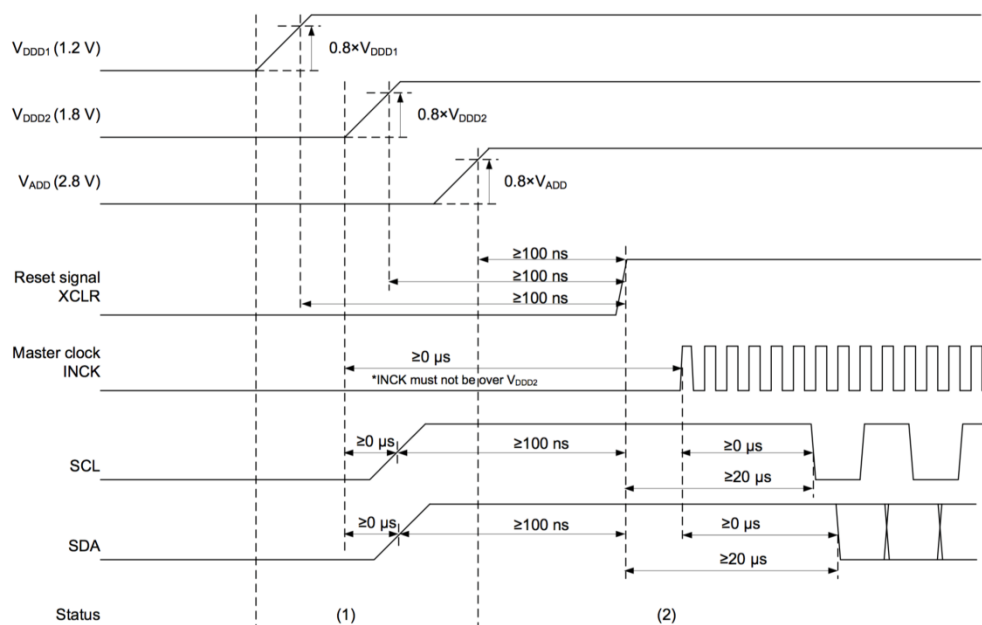

Period name	Remarks
(1) Power stabilization period	All input signals are set to Low level. There are no constraints of the power-on sequence with V_{ADD} , V_{DD1} , and V_{DD2} .
(2) Register communication period for standby cancel	Wait 100 ns after the last power supply in V_{ADD} , V_{DD1} and V_{DD2} . Then set XCLR to "H" and start the standby cancel sequence.

Slew Rate Limitation of Power-on Sequence

Conform to the slew rate limitation shown below when power supply change 0 V to each voltage (0 % to 100 %) in power-on sequence.

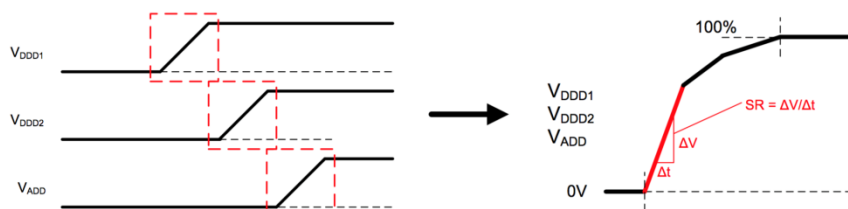


Item	Symbol	Power supply	Min.	Max.	Unit	Remarks
Slew rate	SR	V_{DD1} (1.2 V)	—	25	mV/us	
		V_{DD2} (1.8 V)	—	25	mV/us	
		V_{ADD} (2.8 V)	—	25	mV/us	



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

Power-off Sequence

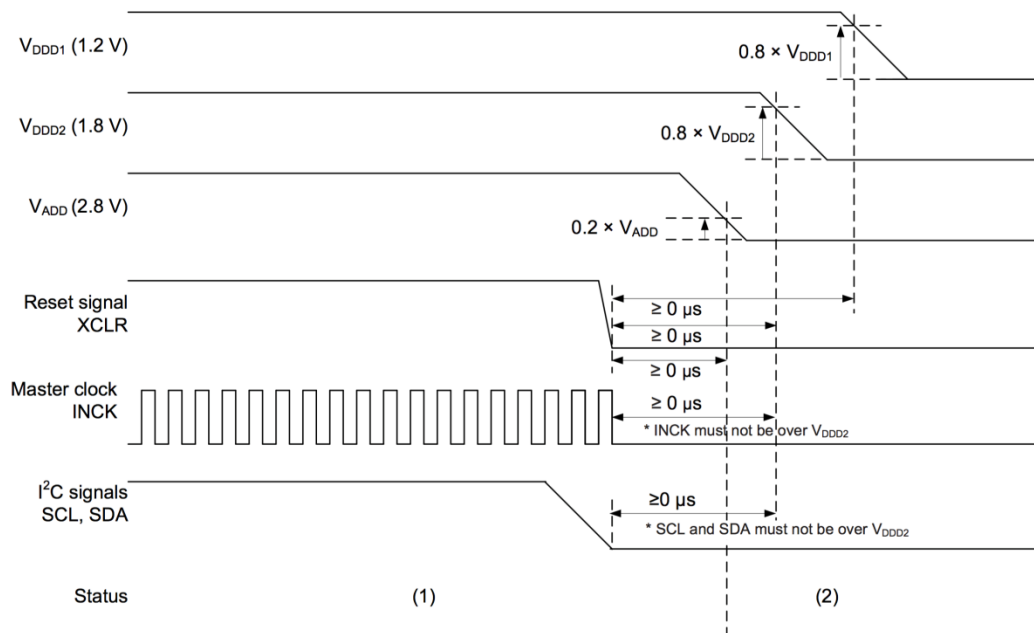

Period name	Remarks
(1) Pixel output period	Pixel signal output period
(2) Power-off period	Turn the power supplies off after all input signals are set to "Low" level except SCL and SDA. Set SCL and SDA to "Low" level at the same time with turning off the power supply of V_{DD2}. There are no constraints of the power-off sequence with V_{ADD}, V_{DD1}, and V_{DD2}.



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

Revision History

Revision	Description	Release Date
1.0	First Release	19. Mar. 2019



Leopard Imaging Inc.

48820 Kato Rd, Suite 100B, Fremont, CA 94538, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com