



Product Features

- TFT active matrix display
- LED backlight
- NTSC/ PAL selectable
- Mirror mode, horizontal flip
- On screen display
- AV1/ AV2 input
- FCC, FE

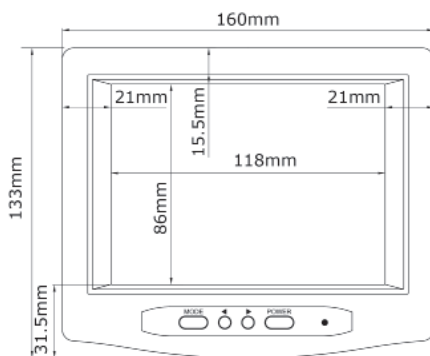

Technical Specifications

Electrical	45M056XR
Display	5.6" TFT Color LCD with LED B/L
Resolution	640 x 480
Active Area	112.896(W) X 84.672(H)
Dot Pitch	0.0588(W) X 0.1764(H)
System	NTSC / PAL Selectable
Viewing Angle	Up/Down/Left/Right: 50°/70°/70°/70°
Response Time	Tr = 10ms max. Tf = 15ms max
Brightness	200 nit
Contrast Ratio	500:1
Video Input	2CH A/V Input 1.0Vp-p at 75 Ohms
Audio Input	2CH Input (MONO) 30Mv~100mVp-p
Video Audio Connector	Mini Phone Jack / Mini Phone Plug to RCA Plug Adapter
USER Control	OSD Control: Mode, <, >, Power
Power	12VDC +/- 10%
Power Consumption	3.6W

Environmental

Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Operating Humidity	30% ~ 90%
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)
Storage Humidity	30% ~ 90%
Lifetime MTBF	> 150000 hrs
Packaging	ESD safe package

Mechanical

Dimensions W x H x D	160mm x 133mm x 37mm (6.29" x 5.23" x 1.18")
Weight	450g (15.873oz)
OSD Controls	Volume, Contrast, Brightness, Hue, Color, Sharpness
Connectors	Mini-phone Jack, Mini-phone Plug to RCA Plug Adapter

Accessories

Included	Mounting Bracket, Power Supply, 2 - AV Cables
----------	---