


C351

Quad SD Mini-PCIe Capture Card

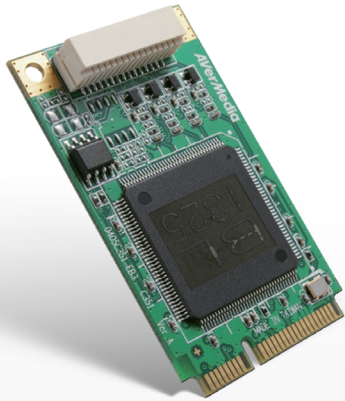

Features

- PCI Express Mini Card form factor
- Composite input interface
- Low power consumption (1.5 Watts)
- 4-channel concurrent video capturing

Introduction

The C351 is a PCI Express Mini video capture card capable of preserving up to four channels simultaneously from multiple input sources. The exclusive hardware design of C351 guarantees a fast response and solid performance for high-density SD capture and encoding demands. The C351 can ingest and capture composite sources for monitoring, archiving or analyzing SD video content with more flexibilities and possibilities.

It is endowed with full functions that required to performing SD video capture for industrial and commercial markets such as data recorder, medical imaging, machine vision or any industrial imaging. commits to shorten the development schedule and providing integrators with a complete and rugged solution towards building their own applications.

Mini PCIe Compact Form Factor

The compact form factor design from a PCI Express Mini Card is perfect to fit into small-footprint embedded system. Also available for vibration-proof lock hole specifically suits for in-vehicle, military and industrial applications.


4 channel concurrent capture solution

The C351 features 4 parallel composite video input interfaces, allowing for more versatility with in a compact card. With 4 channel input the C351 is powerful enough to provide concurrent capture of all 4 video channel at the highest performance while still keeping great video quality.

Support composite Standard (NTSC/PAL)

Capture and digitize NTSC/PAL analog video signal equipped with standard composite, s-video and stereo audio inputs to digitize analog video into uncompressed raw digital data in range of SD resolutions. Supporting PAL, NTSC video standards, dedicated design for professionals requiring capture, edit, and backup solutions for analog video.

Connection Diagram

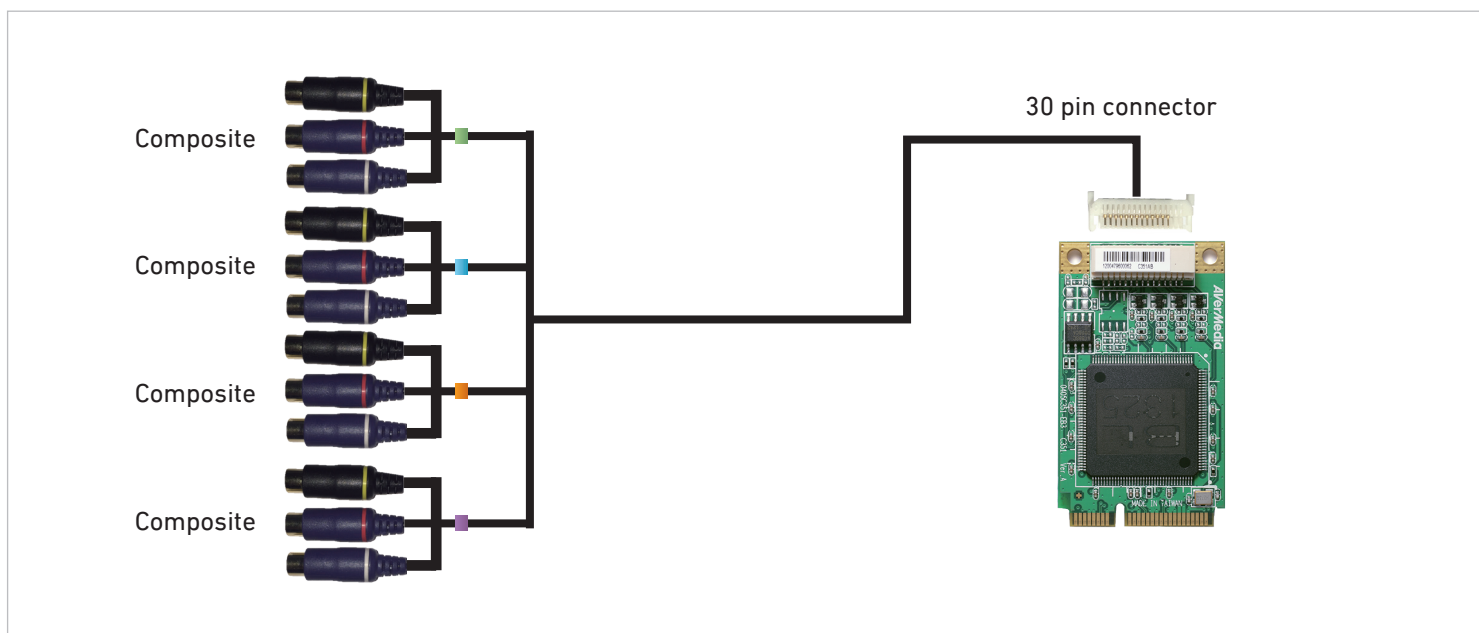

Specifications

| | |
|---------------------------|-----------------------|
| Host Interface | PCI Express Mini Card |
| Audio Interface | Composite L / R |
| Audio Format | PCM |
| Connector Type | 30 pin / RCA |
| Input Interface | Composite |
| Video Format | YUV |
| Color Depth | 8 bit |
| Channel No. | 4 Ch |
| Max. Input Resolution | NTSC / PAL |
| Max. Capturing Resolution | NTSC / PAL |
| Encoding Mode | Software Encoding |

| | |
|-----------------------|-----------------------------------------------------|
| Multi-Channel Support | Yes |
| Multi-Card Support | Yes |
| Supported OS | Windows 7/8.1/10 (32/64 bits), Linux (32/64 bits) * |
| Form factor | Mini Card |
| Dimension (L x W) | 50.80 x 29.85 mm |
| Power Consumption | 1.5W |
| Operating Temperature | 0°C ~ 55°C |
| Operating Humidity | 5% - 80% Relative Humidity |
| Safety Certification | FCC / CE |

* Linux Services

- Support Linux kernel 2.6.14 version and later based on V4L2 & ALSA framework
- Driver customization service by request

Versatile SDK

AVerMedia software development kit (SDK), a set of development tools that allows a software engineer to seamlessly integrate video capture modules into application specific systems. Available upon request are the SDK Basic, SDK Pro and to better match each application's specific requirements premium add-on kits.

Ordering Information

- C351 : Quad SD Mini-PCIe Capture Card
- Accessories:
 - 30 pin connector to composite breakout cable (Optional)
- SDK kits
 - SDK Basic
 - SDK Pro (Optional)
 - SDK Premium add-on kits (Optional)