



# S124H16D-L26

## 3.0 megapixel low-light 2 Boards IP Camera Module, Hi3516D + SONY IMX124 CMOS

1/2.8" 3.0 Megapixels Progressive Scan Sony IMX124 CMOS, Hisilicon Hi3516D Chipset, the highest resolution of 2048\*1536, 0.001 Lux@F1.2 (**color**); 38X38mm 2 boards ; RS485,Optional Motorized lens, IR - CUT (day/night), adapt Bullet, Dome;H.264 or H.265 video coding, double stream, ONVIF 2.4, be compatible many NVR and platform management software.



## Features





- > Hisilicon Hi3516D
- > 1/2.8"3.0 Megapixels Progressive Scan Sony IMX124 CMOS
- > Max 25/30fps@2.0 Megapixels (2048\*1536)
- > H.264/H.265 & MJPEG dual-stream encoding
- > Super low-light, 0.001 Lux@F1.2 (**color**)
- > Privacy Mask, Motion Detection
- > Support Onvif 2.4 protocol
- > WDR>80db

## Specifications

<b>Model</b>	S124H16D-L26
<b>Camera</b>	
Image Sensor	1/2.8" 3.0 megapixels Progressive Sony IMX124 CMOS
CPU	Hisilicon 3516D
Effective Pixels	2048(H)x1536(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto (1/25 ~ 1/10000s)
Min. Illumination	0.001Lux/F1.2 (Color)
S/N Ratio	≥50db(AGC OFF)
<b>Camera Features</b>	
Day/Night	Auto(ICR)/Color/B/W
WDR	> 80db
White Balance	Auto
Gain Control	Auto
Noise Reduction	3D
Privacy Masking	Up to 4 areas

<b>Video</b>		
Compression		H.264/MJPEG/H.265
Resolution		2048*1536/1080P(1920*1080)/720P(1280*720)/D1(704*576)/VGA(640*480)/QVGA(320*240)
Frame Rate	Main Stream	2048*1536/1920*1080/720P(1280*720)(1 ~ 25/30fps)
	Sub Stream	D1/VGA/QVGA(1 ~ 25/30fps)
Bit Rate		32KB ~16Mbps, support VBR, CBR
Text Overlay		Channel, Date & Time, Bit Rate
<b>Network</b>		
Data Storage		Video record, Picture format
Trigger		Manual, Automatic(motion detection, alarm, schedule, cycle )
Alarm data transmission		FTP, E-mail, Browser, CMS
Protocol		TCP/IP、UDP、RTP、RTSP、RTCP、HTTP、DNS、DDNS、DHCP、FTP、NTP、PPPOE、SMTP、UPNP
ONVIF		ONVIF 2.4
Max. User Access		8 users, IE, Google, Firefox
Smart Phone		Windows Mobile, iPhone, iPad, Android
<b>Auxiliary Interface</b>		
Audio in		Support
Audio out		Support
BNC Video out		Support
RS422/RS485		Support
USB		Support (32G USB flash)
Alarm in		Support
Alarm out		N/A
IO Interface		Support
<b>General</b>		
Power Supply		DC12V / PoE (802.3af)
Power Consumption		<3W
Working Environment		-20°C~+55°C , Less than 90% RH
Dimensions		38 x 38 x 20mm
Weight		0.15kg

## Connector

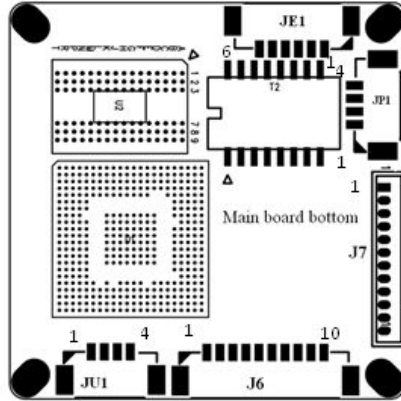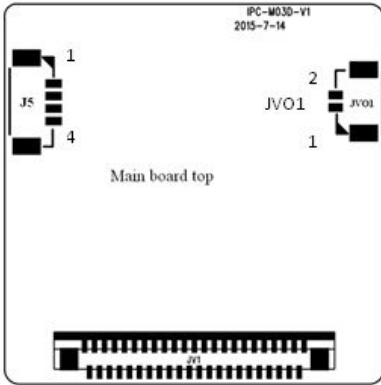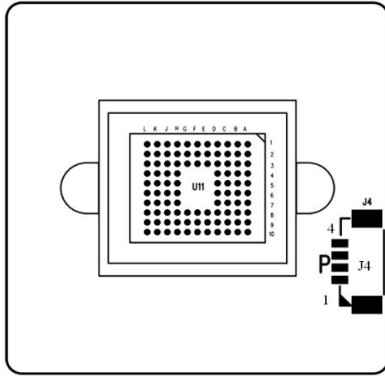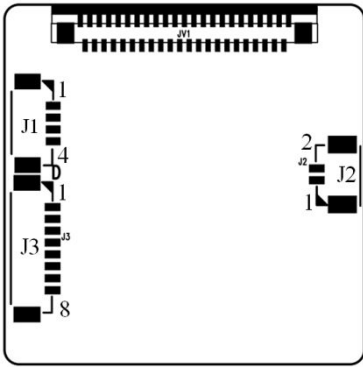

**JP1 Power Supply Connector**

1	DC12V
2	CMT_R
3	CMT_T
4	GND

**JE1 Network Connector**

1	RJ45_1
2	RJ45_2
3	RJ45_3
4	RJ45_6
5	Network Connected Light (Green light)
6	Network Status Light (Yellow light)

**J1 IR-cut Connector**

1	IR-CUT Control Signal5V
2	IR-CUT Control Signal5V

**J2 DC Auto-iris Connector**

1	Drive -
2	Damp-
3	Damp+
4	Drive +

**J3 Motorized Lens Connector(For AZ Series and lens YT2812FB.ICR-J-6)**

1	Focus A-
2	Focus A+
3	Zoom A-
4	Zoom A+

5	Zoom B+
6	Zoom B-
7	Focus B-
8	Focus B+
<b>J4 P-Iris Connector</b>	
1	IRIS A-
2	IRIS B+
3	IRIS A+
4	IRIS B-
<b>J5 IR Light Board Connector</b>	
1	IR Light Board Power Supply (12V)
2	GND
3	IR Feedback Signal Input (0.8V-12V)
4	IC PWM Control
<b>JVO1 BNC Video out</b>	
1	BNC Video out
2	GND
<b>J6 Functions Connector</b>	
1	Audio In (MIC/ Line )
2	GND (Audio)
3	Audio Out
4	GND
5	Reset
6	Alarm In
7	NULL
8	NULL
9	RS_485+
10	RS_485-
<b>JU1</b>	
1	GND
2	USB_DP
3	USB_DM
4	5V Power Supply