

Tegra PC (EX713-AA)

Embedded Vision Solutions based on NVIDIA Jetson TX1/TX2




Features

- Operate with NVIDIA Tegra X1/X2 module to build up a high performance Tegra X1/X2 system
- On-board 2 full-height Mini PCIe slots to provide the expandability of connecting AVerMedia Mini-PCIe frame grabbers C353, CM313B, and C351 for audio/video capturing, encoding, and post processing
- 2 USB 3.0 for Tegra X1/X2
- Battery power
- Design with Mini-ITX (170 mm x 170mm X 41mm) form factors for flexible system configuration
- Suitable for applications of robotics, UAV, UGV, AOI, medical image, and other video-enabled equipment for automation, AI, and deep learning


Specifications

Support Module	NVIDIA Tegra X1/X2 Module
Video Interface	1x HDMI Out Type A, 4096 x 2160 p60
Storage	1x SATA 3Gb/s and SATA Power, 1x SD card
LAN Port	1x RJ-45 for Gigabyte Ethernet
Buttons	Power on/off, Reset, Recovery
Multiple PCI Express and USB3.0	2x Full-height Mini-PCI Express 2x USB3.0 Type A
USB2.0	1x USB2.0 Micro-B
Camera Connection Supported by AVerMedia frame grabber	HDMI, VGA, 3G-SDI, and Composite
Other Interface	1 x UART, 1 x SPI, 1 x I2S, 1x I2C, 7 GPIOs
Power Supply	+12VDC/5A
Battery Power	Support with power management
Operating Temperature	0°C ~ +55°C (standard version)
Operating Humidity	10% ~ 90% (RH)
Storage Temperature	-25°C ~ +105°C
Dimension	Mini-ITX, 170mm x 170mm

Block Diagram

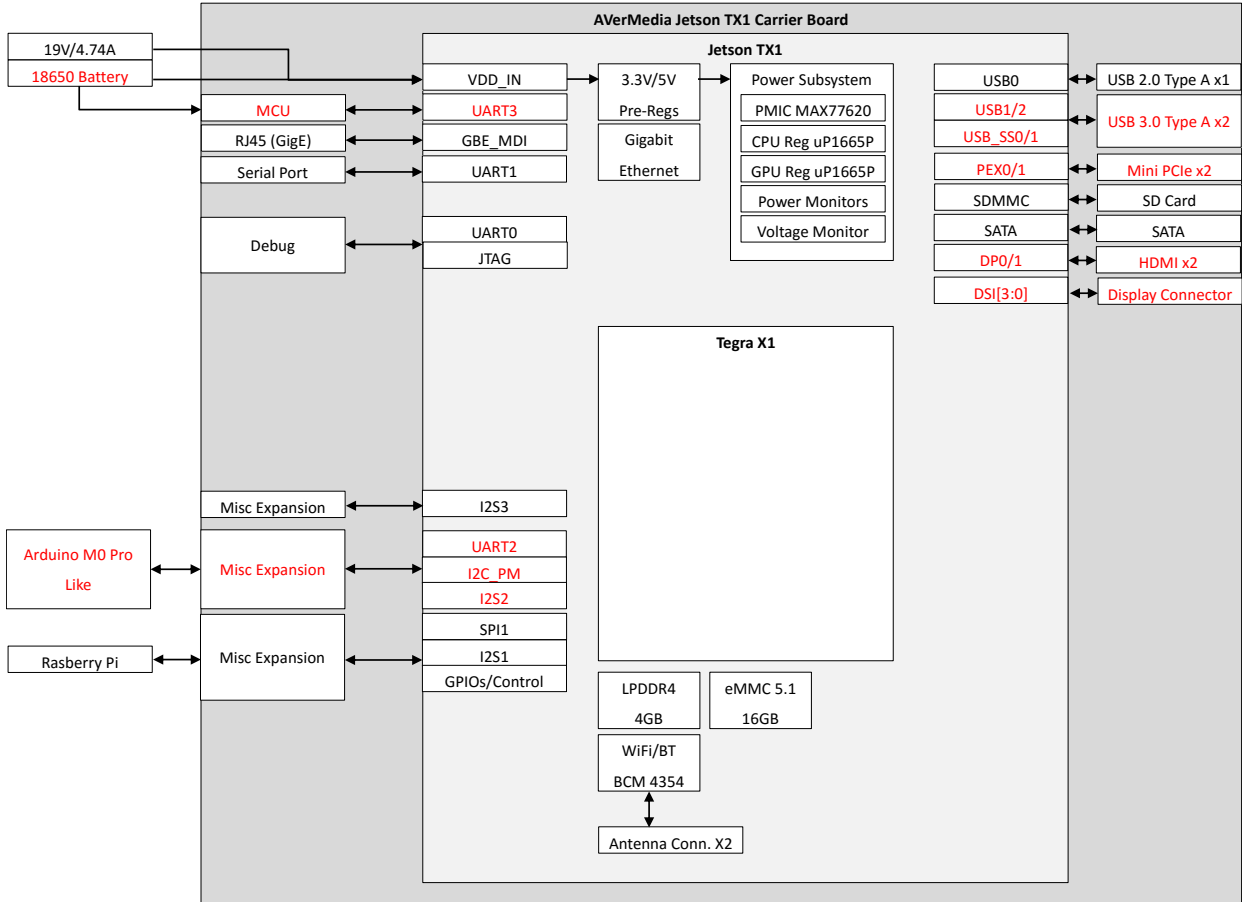

Dimensions

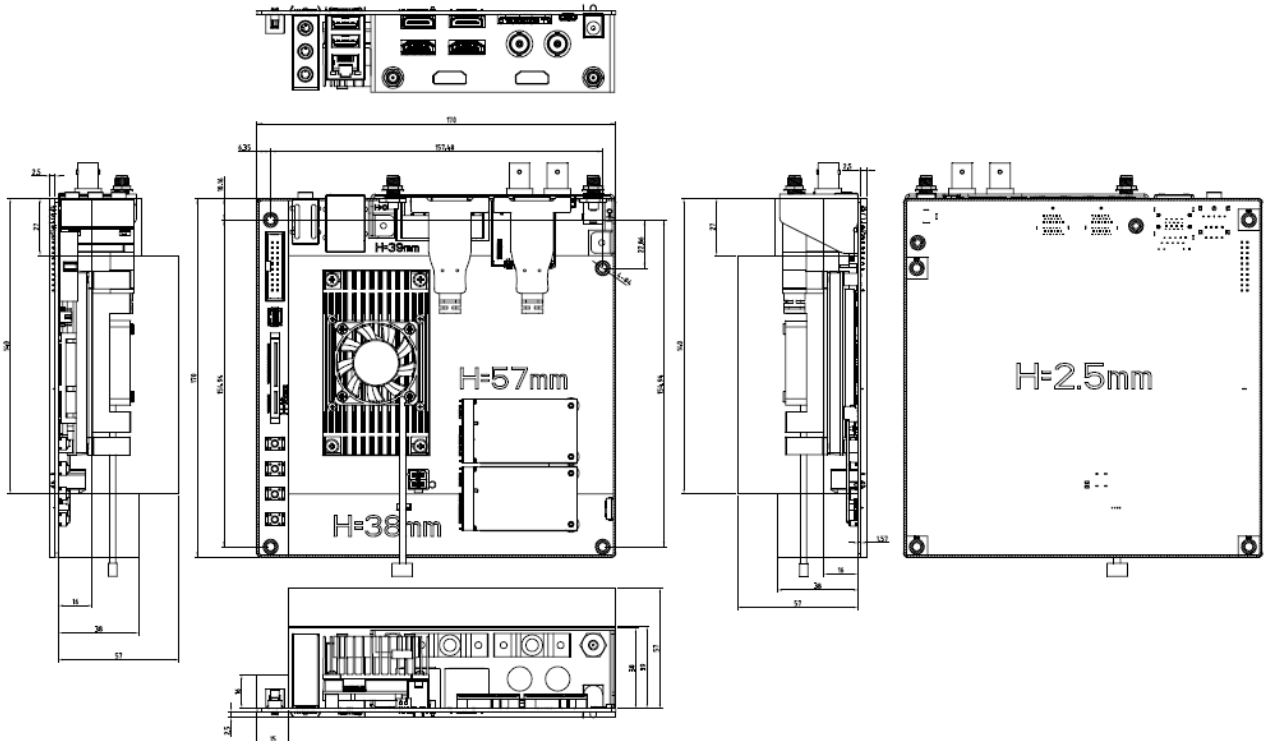

Perspective View

