



LEOPARD IMAGING INC

LI-IMX490-GW5200-FPDLINKIII-xxxH

Data Sheet

Key Features


- Sony Diagonal 10.36mm (Type 1/1.55)
5.36MP CMOS Image Sensor IMX490
- Optical format: 1/1.55"
- Resolution: 2880H x 1860V
- Pixel size: 3.0 μm x 3.0 μm
- YUV output without compression
- Includes GEO Semi GW5200 ISP
- Support HDR
- Lens: FOV H 40 / 65 / 90 / 120
- TI953 FPD-Link III Serializer
- Connector: FAKRA Z TYPE
- Water proof: IP67 (Up to IP69K)
- Operation Temp: -40 ~ 85 °C
- Storage Temp: -40 ~ 125 °C
- Size: 30 x 30 x 37.8 mm
- Weight: 55 ~ 80g (based on lens)
- Part#:
LI-IMX490-GW5200-FPDLINKIII-xxxH



Application

- Automotive ADAS
- 5MP video applications
- ADAS + Viewing Fusion

Dimensions

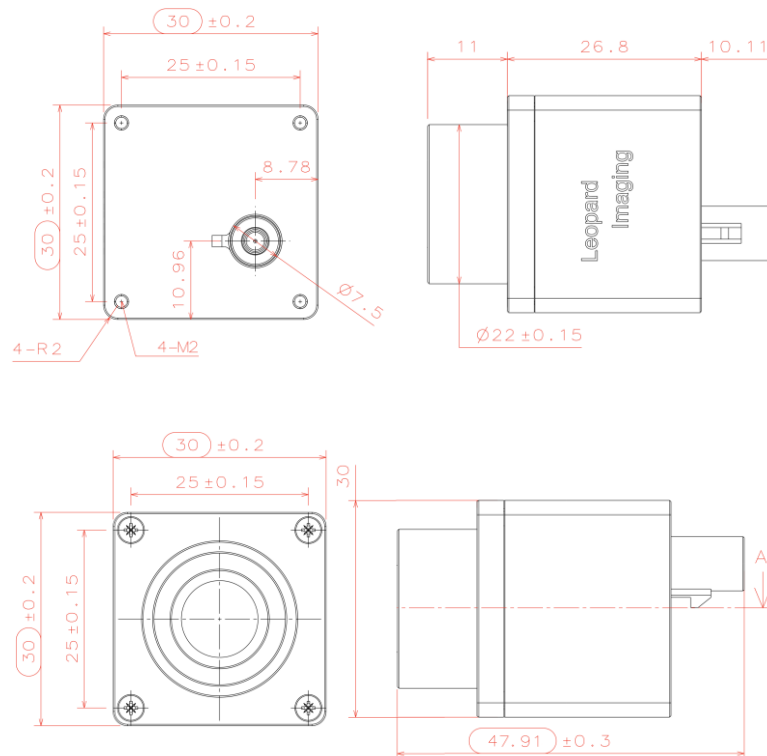


USA Office
48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
Phone: + 86-139-1857-8492
王斌(Robin Wang)
Email: robinw@leopardimaging.com

BOM

#	Name	SPEC	QTY/SET
1	M12 Lens	DSL612 DSL608 DSL492 Car-53	1
2	Screw	KM2*8 black STAINLESS 304	4
3	Shell 2	AL6061-T6 BLACK Anodizing	1
4	Sealing ring	Silicon rubber, White	1
5	LI-IMX490-MIPI-FKR	IMX490 sensor board	1
6	Copper pillar	M2*5+4	4
7	LI-TI953-FKR	FPD-Link III serializer board	1
8	O ring	7*2.4 Silicon rubber Red	1
9	Screw	M2*4 black ZINC	2
10	Shell 1	AL6061-T6 BLACK Anodizing	1
13	LI-GW5200-MIPI	GW5200 ISP board	1






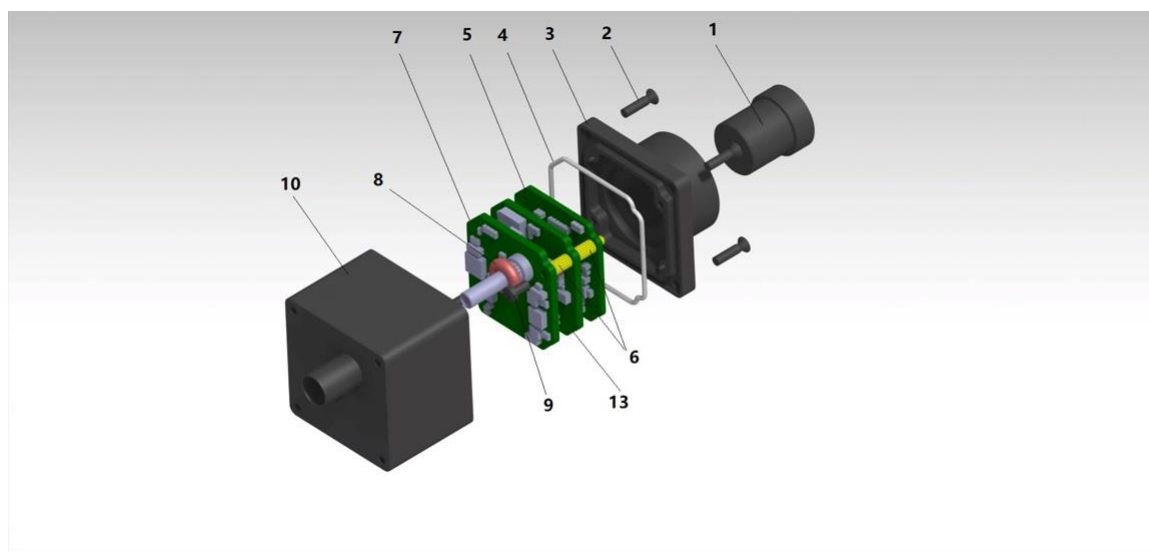


USA Office
 48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
 Phone: + 86-139-1857-8492
 王斌(Robin Wang)
 Email: robinw@leopardimaging.com

Camera boards Dimensions

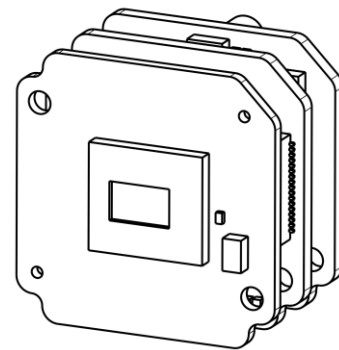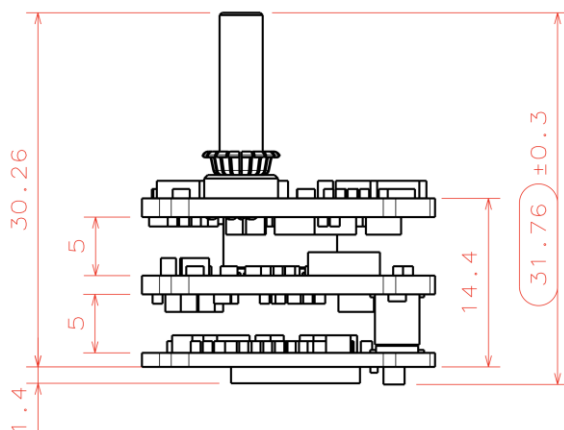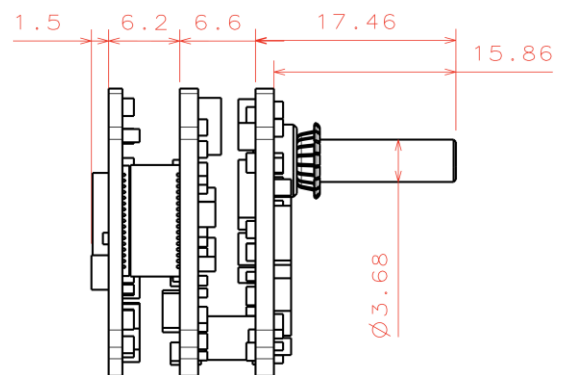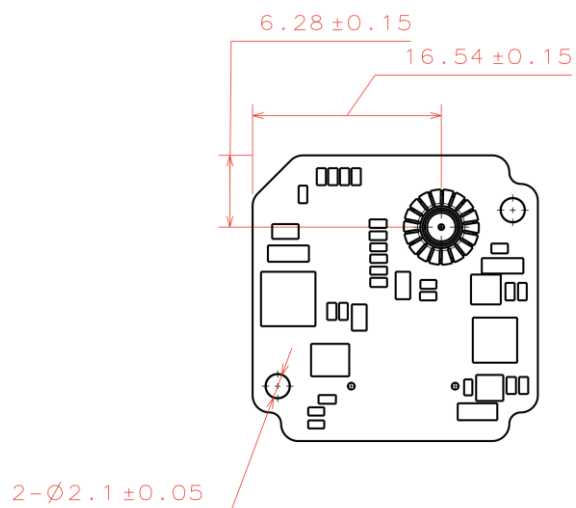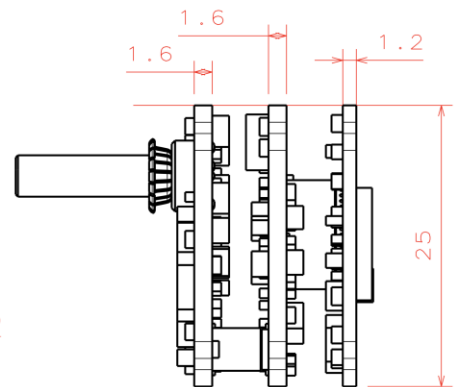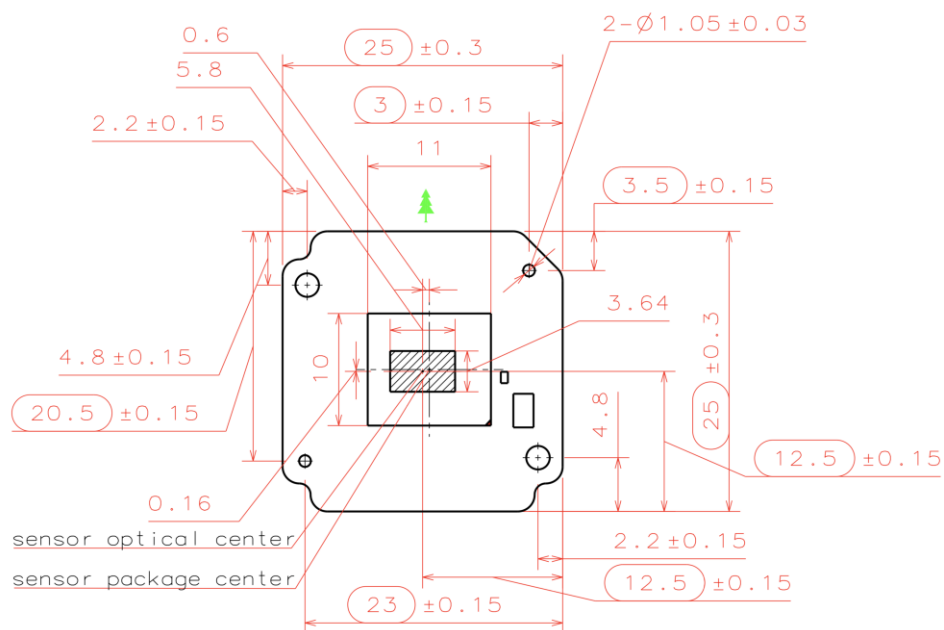


USA Office
48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
Phone: + 86-139-1857-8492
王斌(Robin Wang)
Email: robinw@leopardimaging.com

Water Proof

- Metal Housing
- Water-proof M12 lens
- Sealed Gasket (White)
- Sealed O-ring (Red)

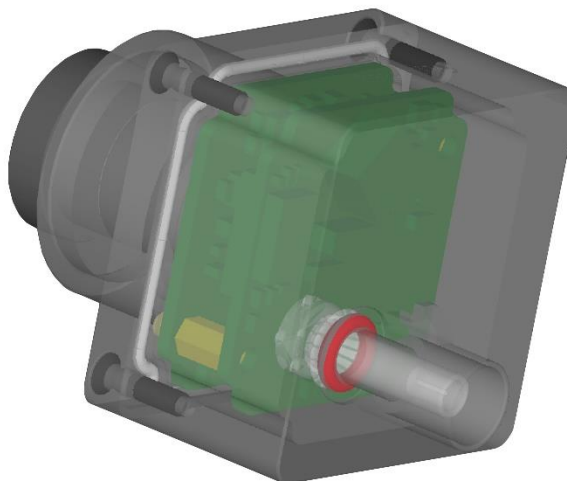

Cable Connector

- Housing Connector- FAKRA Z Type
- Cable length: 3 meters
Support single Coax Cable transmit up to 12 meters
- Cable Part#: FAK-SMZSMZ-0008
- FAKRA type connectors



USA Office
48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Shanghai Office (China)


上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
Phone: + 86-139-1857-8492
王斌(Robin Wang)
Email: robinw@leopardimaging.com

Ordering Information

Part#: LI-IMX490-GW5200-FPDLINKIII-xxxH

Note:

xxxH - 040H: FOV H 40 °
 065H: FOV H 65 °
 090H: FOV H 90 °
 120H: FOV H 120 °

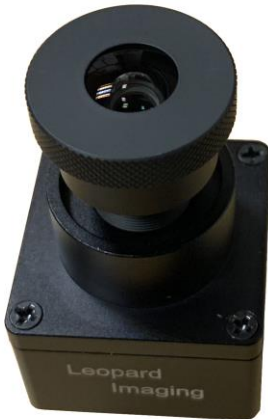LI-IMX490-GW5200-FPDLINKIII-040H	LI-IMX490-GW5200-FPDLINKIII-065H	LI-IMX490-GW5200-FPDLINKIII-090H	LI-IMX490-GW5200-FPDLINKIII-120H
			
Lens: DSL612 Lens EFL: 11.9 mm F/#: 2.0 FOV(D): 44.4° FOV(H): 38° FOV(V): 20.8° Mount: M12	Lens: DSL608 Lens EFL: 7.9 mm F/#: 2.0 FOV(H): 74° FOV(H): 65° FOV(H): 37° Mount: M12	Lens: DSL492 Lens EFL: 5.9 mm F/#: 2.9 FOV(H): 100.8° FOV(H): 88.4° FOV(H): 52° Mount: M20	Lens: CAR-53 Lens EFL: 4.47 mm F/#: 1.6 FOV(H): 152° FOV(H): 121.5° FOV(H): 68° Mount: M16



USA Office
 48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
 Phone: +1-408-263-0988
 Fax: +1-408-217-1960
 Email: sales@leopardimaging.com
 Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
 Phone: + 86-139-1857-8492
 王斌(Robin Wang)
 Email: robinw@leopardimaging.com

LI-USB30-DESER-FPDLINKIII



LI-IMX490-GW5200-FPDLINKIII can connect to LI-USB30-DESER-FPDLINKIII as a USB 3.0 camera. Part#: **LI-USB30-IMX490-GW5200-FPDLINKIII-xxxH**

Key Features

- USB 3.0 Super Speed support
- YUV output without compression
- Support HDR
- UVC compliance
- Provide customization services
- 12VDC Power Supply (Comes with camera)
- Weight: 178 g
- Single Coax Cable transmit up to 12 meter PoC(Power over Cable)
- Support 2880x1860@30fps
- Power consumption: < 230mA at 12VDC
- Support Windows, Linux OS and other OS which include UVC drivers

SDK Supported

- Camera Tool Source Code in C#
- Capture & Display



USA Office
48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
Phone: + 86-139-1857-8492
王斌(Robin Wang)
Email: robinw@leopardimaging.com

Revision History

Revision	Description	Release Date
1.0	First Release	29. Aug. 2019



USA Office
48820 Kato Rd, Suite 100B, Fremont, CA 95035, USA
Phone: +1-408-263-0988
Fax: +1-408-217-1960
Email: sales@leopardimaging.com
Website: www.leopardimaging.com

Shanghai Office (China)

上海市闵行区宜山路 1618 号新意城 A 座 9 楼 A910, 201103
Phone: + 86-139-1857-8492
王斌(**Robin Wang**)
Email: robinw@leopardimaging.com